


Cash Drawer Installation

You can install a cash drawer through the cash drawer port. Please verify the pin assignment before installation.

Cash Drawer Pin Assignment



Pin	Signal
1	GND
2	DOUT bit0
3	DIN bit0
4	12V / 24V
5	DOUT bit1
6	GND

Cash Drawer Controller Register


The Cash Drawer Controller use one I/O addresses to control the Cash Drawer.

Register Location: 4B8h

Attribute: Read / Write

Size: 8bit

BIT	BIT7	BIT6	BIT5	BIT4	BIT3	BIT2	BIT1	BIT0
Attribute	Reserved	Reserved	Reserved	Read	Reserved	Write	Write	Reserved

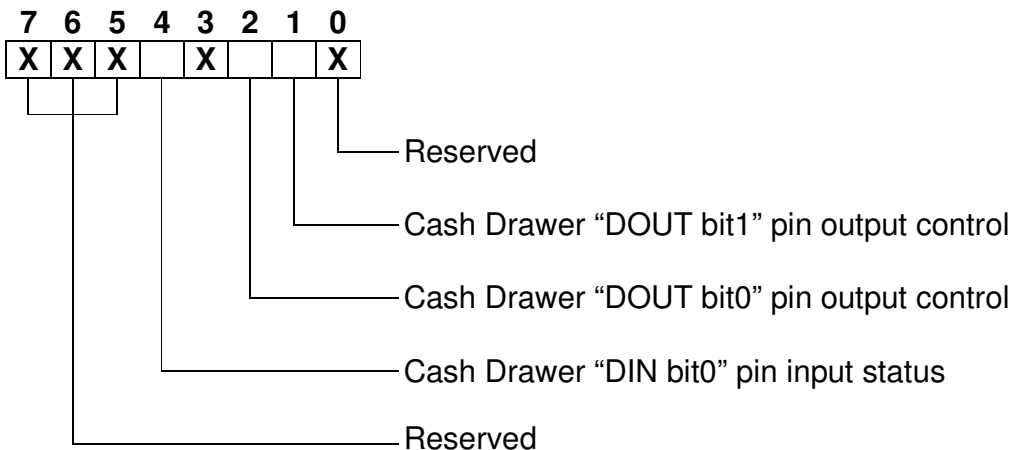

Bit 7: Reserved.

Bit 6: Reserved.

Bit 5: Reserved.

Bit 4: Cash Drawer "DIN bit0" pin input status.

= 1: the Cash Drawer closed or no Cash Drawer.

= 0: the Cash Drawer opened.

Bit 3: Reserved.

Bit 2: Cash Drawer “DOUT bit0” pin output control.

= 1: Opening the Cash Drawer

= 0: Allow closing the Cash Drawer

Bit 1: Cash Drawer “DOUT bit1” pin output control.

= 1: Opening the Cash Drawer

= 0: Allow closing the Cash Drawer

Bit 0: Reserved

Note: Please follow the Cash Drawer control signal design to control the Cash Drawer.

Cash Drawer Control Command Example

Use Debug.EXE program under DOS or Windows98

Command	Cash Drawer
O 4B8 04	Opening
O 4B8 00	Allow to closing

➤ Set the I/O address 4B8h bit2 =1 for opening the Cash Drawer by “DOUT bit0” pin control.
➤ Set the I/O address 4B8h bit2 = 0 to allow closing Cash Drawer.

Command	Cash Drawer
I 4B8	Check status

➤ The I/O address 4B8h bit4 =1 means the Cash Drawer is closed or no Cash Drawer.
➤ The I/O address 4B8h bit4 =0 means the Cash Drawer is open.